


COLECO®
ADAM™
CPU

Adam™ CPU (memory console) for use in the Colecovision™ family computer system... Features Z80/MC6801 processor technology with 80 K bytes of RAM and 40 K bytes of ROM with built-in digital data drive (256 K byte) with space for adding an additional drive. Output of CPU can be used with any standard TVRCVR or monitor for display. Also can be used as a word processor utilizing the built-in program or Coleco™ game cartridges for entertainment (not supplied). With instructions. Units are refurbished, fully tested and guaranteed by H&R for 30 days. Excellent condition. Supplied less power supply, keyboard and interconnecting cables. Shpg Wt, 14 lbs.

H&R#TM24K323

\$79.50

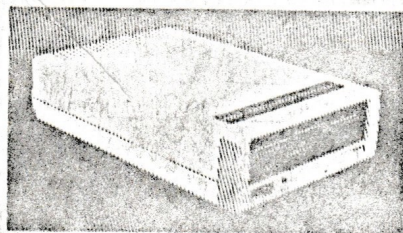

ADAM™
5-1/4" DISK DRIVE



Originally made for use with the Adam™ Home Computer, made by Coleco®. This self-contained 5-1/4" disk drive unit utilizes standard SS/DD 5-1/4" diskettes. Can hold up to 160 K bytes of information. Connects directly to your Adam™ Console (interconnect cables not supplied). Power supply & operating instructions supplied, (no disk manager included). Refurbished, fully tested and guaranteed by H&R for 30 days. Excellent condition. Shipping Weight, 7 lbs.

H&R#TM24K322

\$99.50

COMPACT COATED HYBRID REAR TV PROJECTION LENS

FAST F1.0, FOCAL LENGTH 102.4 mm



Mfd by U.S. Precision Lens for Sharp, the Delta 7TAC Rev B is a fast F1.0 lens with 102.4 mm focal length. Designed for use in rear projection large screen TV systems. The unique design utilizes a glass element in combination with plastic lens elements for increased thermal stability. A reflecting mirror angled at 72° between the primary element and the Abberation Corrector allows smaller cabinet size. Condensed Specifications: Covers up to 127 mm (5") diagonal CRT, Aspect Ratio 3 x 4, Focusing via locking Helical system. For use with rear projection screens 914 mm (36") to 1270 (50"), resolution minimum of 3 line pairs per mm. Lens housing constructed from black G.E. Lexan™ or equal. Designed to mount, on an angled platform with a 5" dia. cutout, via four screw holes on mounting flange (CRT also angled). O/A size 7 1/4 x 5 1/2 x 6". Units are ideal for replacement in certain Sharp systems; construction of large screen computer data displays and classroom projection of CRT images, etc. Supplied with typical mounting drawing. New. Shpg Wt ea, 5 lbs.

H&R#TM24K296

\$39.50 EA.

3 @ \$32.00 EA.

MAG-STRIPE
CARD READER
ASSEMBLY

Mfd. for Sperry-Univac
P/N 2825386-000
The heart of this unit is an
American Magnetics Mod.
40SDA-1 single track mag-



stripe card reader connected to a Sperry microcode board containing an Intel D8748, A8109A and other assorted IC's and diodes. Card reader will read data on striped cards conforming to ANSI 14.16 1976 specs. Assembly housed in a gray molded case, 8 1/2 x 4 1/2 x 2 3/4" H. Information sheet on card reader. Listed for parts contained. New. Shpg Wt ea, 4 lbs.

H&R#TM24K278


\$12.50 EA.

4 @ \$11.50 EA.

DYNAMIC DISSOLVE CONTROLLER

For Audio Visual use with Kodak®/Ektagraphic® Projectors


... Spindler & Sauppe Mod. 772 Dynamic dissolve controller unit designed for use with Ektagraphic® projectors. Features adjustable time, panel mounted pushbutton switches for focus, step-up, Alt, standby, Rev, cut and lap, along with lever style on-off switch. Rear panel has two 3-wire U-ground outlets for projectors (max.

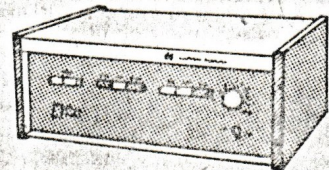

load 115 V, 600 Watts). Attached control cables for right and left projector and 10 pin socket for remote control (not supplied). Unit operates on 115 VAC, 50/60 Hz, 40 Watts. Complete with attached 3-wire line cord and plug. Size 11 1/2 x 8 1/2 x 4 1/2". Removed from service; excellent condition. Shpg Wt, 12 lbs.

H&R#TM24K266

\$150.00

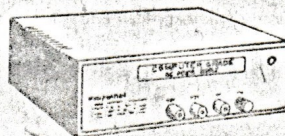

Computer Grade TRIPLE OUTPUT
REGULATED LINEAR POWER SUPPLY
+12 Volts @ 6 AMPS,
+5 V @ 2 A and -5 V @ 1 A

Bench style triple output power supply... Ideal for small computer, disk drive, controller, automobile radio or audio equipment servicing. Input 115 VAC, 60 Hz. Outputs +12 V @ 6 A (10 A max. Int), +5 V @ 2 A (3 A max Int), and -5 V @ 0.5 Amps (1 A max Int) with common return. Unit features excellent load & line regulation with low ripple and noise. Also has built-in surge protection and RF & EMI filtering. Housed in a light beige finished metal enclosure (9-3/16 W x 3 1/2" (including rubber feet) x 8" dp) with front mounted multi-function binding posts and LED. Complete with 3 wire AC cord & plug. New. Shpg Wt, 8 lbs.

H&R#TM24K299

\$29.95

REGULATED QUAD OUTPUT BENCH POWER SUPPLY
ONE VARIABLE METERED OUTPUT, THREE FIXED

Elenco Mod. XP-580... Linear solid state DC supply contains three fixed and one variable metered output, all fully regulated. Ideal for use in schools, labs, service shops. May be used for servicing computer disk drives and control boards.


DC	Fixed	Fixed	Fixed	Variable
Output Voltage	+5 V	-5 V	+12 V	+2 to +20 V
Output Current	3 A	0.5 A	1 A	2.5 A @ 15 V

\$59.50 EA.

10 @ \$50.00 EA.

H&R#TM24K260

All outputs, fixed and variable feature short protection; 0.05 VDC output regulation; 0.05 VDC line regulation and 0.005 VDC ripple max. RMS. Special circuitry regulates line, load and protects against excessive output demands. Outputs via panel mount multi use binding post. Volt and Amp meter for monitoring variable output. Metal cabinet 9 1/4 W x 8 1/4 x 3 1/2" H. Complete with three wire AC cordset, instructions & schematic and manufacturers' warranty. New. Shpg Wt ea, 12 lbs.

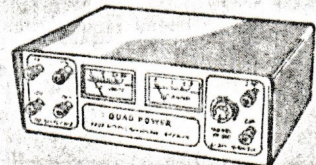


Lightweight, High Current SWITCHING POWER SUPPLY 5 VDC, 20 AMPS

Power-One® SF5-20... Rated output 5.0 Volts, 20 Amps with OVP 6.2 Volts ±5%. Features dual input 90-130 VAC or 160-260 VAC, 47-63 Hz. Regulation line and load ±0.1%. Output noise and ripple 50 mV peak-to-peak max. Equipped with inhibit and remote sensing terminals. Fully shielded unit 10 long x 4-7/8 x 2" deep. Designed for apparatus mounting. Supplied with data sheet. New. Shpg Wt, 5 lbs.

H&R#TM24K327

\$42.50

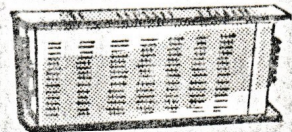

HIGH VOLTAGE VACUUM RELAY 15 AMPS 15 KV

Torr #T8RA... Similar to Jennings RD5B Miniature HV vacuum relay. Coil voltage 26.5 VDC. Contacts S.P. N.O. Rated 15 KV, 15 Amps (peak test 20 KV). Designed to mount in a 13/16" dia. hole. All connections via solder terminals. Size 1.06" dia. max. x 2.75" H. New. Shipping Weight, 1 lb.

H&R#TM24K314

\$70.00

